

Use and maintenance instructions
DRACMA 140



Ground recessed luminaire including a recessed box.
 TECHNICAL DETAILS: refer to the product label

CE The EU declaration of conformity can be downloaded from our website www.marecoluce.it


IP67 Protection degree against dust ingress, solid particles, moisture

Can be driven on by vehicles, max weight load 2500 Kg, 20 Km/h

This product must not be disposed as a normal household waste

- WARNINGS:**
- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
 - THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS AND WILL VOID ANY WARRANTY OR LIABILITY.
 - SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
 - THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
 - DO NOT INSTALL THE LUMINAIRES IN HOLLOWES OR IN AREAS WITH WATER STAGNATION.
 - THE RECESSED BOX IS AN ESSENTIAL PART OF THE LUMINAIRE, THEREFORE INSTALLING THE LUMINAIRE WITHOUT THE RECESSED BOX IS NOT PERMITTED.
 - THE DRAINAGE OF THE RECESSED BOX IS COMPULSORY. IN CASE OF INSTALLATION IN CONCRETE PLINTH IT IS NECESSARY TO USE A DRAIN PIPE.
 - DO NOT USE ANY TOOL TO REMOVE THE DIFFUSER AS THIS COULD DAMAGE THE GASKET.
 - THE LUMINAIRE MUST BE CONNECTED TO THE EARTH CIRCUIT OF THE ELECTRICAL SYSTEM.
 - ANY PART OF THE LUMINAIRE NOT PROTECTED FROM THE RECESSED BOX SHOULD COME IN CONTACT WITH THE GROUND OR WITH HARSH CHEMICALS, DEFROSTING AGENTS, SALINE ENVIRONMENTS.
 - DO NOT COVER THE VISIBLE PARTS OF THE LUMINAIRE.
 - DO NOT INSTALL THE PRODUCT IN CASE OF RAIN, FOG OR STRONG MOISTURE.
 - DAMAGED COMPONENTS MUST BE REPLACED WITH MARECO LUCE ORIGINAL SPARE PARTS BEFORE REUSING THE PRODUCT.
 - THE MAX. TEMPERATURE MEASURED ON THE DIFFUSER CONCERNS A LAMP WITH WIDE LIGHT BEAM. IF LAMPS WITH NARROWER BEAMS ARE USED THE TEMPERATURE ON THE DIFFUSER WILL BE HIGHER.

- GENERAL MAINTENANCE RECOMMENDATIONS:**
- CLEAN THE EXTERIOR PART OF THE LUMINAIRE PERIODICALLY IN ORDER TO REMOVE DIRT DEPOSITS ON THE DIFFUSER AND ON THE FRAME.
 - DO NOT USE HARSH DETERGENTS OR HIGH-PRESSURE WATER JET MACHINES TO CLEAN THE DIFFUSER.
 - CHECK THE TIGHTNESS OF THE SCREWS SECURING THE LUMINAIRE (2,5 Nm).
 - WE RECOMMEND USING SILICONE GREASE ON THE FIXING SCREW THREADS TO MAKE FUTURE MAINTENANCE EASIER.
 - CHECK THE INTEGRITY OF THE COMPONENTS AND REPLACEMENT IN CASE OF DAMAGE BY USING ONLY MARECO LUCE ORIGINAL SPARE PARTS.
 - CHECK THE INTEGRITY AND THE FLEXIBILITY OF THE GASKETS, WHICH MUST HARDEN, BREAK OR DAMAGE IN ANY WAY.

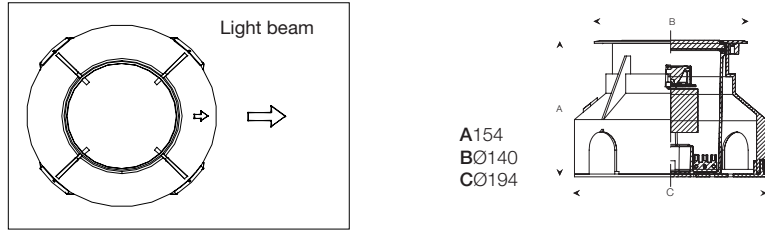

- INSTRUCTION TO CEMENT THE RECESSED BOX:**
1. Lay at least 20 cm of draining material at the bottom of the hole to allow water outflow.
 2. Fill the hole with water and make sure that it flows out within 30 min. If this is not the case, a further drainage is necessary (i.e. draining pipe).
 3. Lay the recessed box and proceed to cementing flush with the mounting surface so that the arrow is directed towards the desired area to illuminate.
 4. Clean the inside of the recessed box and install the luminaire.

