



Use and maintenance instructions

Mirò Led


Fixed luminaire for general purpose suitable for installation on bracket/ pastoral with connection Ø60mm


TECHNICAL DETAILS: refer to the product label


 The UE declaration of conformity can be downloaded from our website www.marecoluce.it

 Insulation Class II

IP65 Protection degree against dust ingress, solid particles, moisture

 This luminaire holds a lighting source in “D” energy efficiency class.

 Caution, risk of electrical shock.
The lighting source of this luminaire must be replaced by the Manufacturer only

 This product must not be disposed as a normal household waste

WARNINGS.

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS, AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS, AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- DO NOT INSTALL THE LUMINAIRE AT A HEIGHT LOWER THAN 3 METERS.
- DAMAGED COMPONENTS MUST BE REPLACED BEFORE PUTTING THE PRODUCT BACK INTO SERVICE WITH MARECOLUCE SPARE PARTS.

GENERAL MAINTENANCE RECOMMENDATIONS:

- CLEAN THE LUMINAIRE PERIODICALLY TO REMOVE POSSIBLE DIRT DEPOSITS THAT MAY DAMAGE IT OR ALTER THE PHOTOMETRICS PERFORMANCE.
- DO NOT USE HARSH DETERGENTS, ABRASIVE CLOTHES, HIGH- PRESSURE WASHERS, WATER AT A TEMPERATURE HIGHER THAN 60°C TO CLEAN THE LUMINAIRE.
- CHECK THE TIGHTENING OF THE SCREWS THAT SECURE THE LUMINAIRE TO THE BRACKET/PASTORAL CONNECTION.
- CHECK THE INTEGRITY OF THE FITTING COMPONTS: REPLACE THEM IN CASE OF DAMAGE BY USING ONLY ORIGINAL MARECO LUCE PARTS.


INSTALLATION INSTRUCTIONS:

1. Bend the sheath (1) as shown in the picture, and insert it into the coupling.
2. Connect the cable coming out from the luminaire (2) to the power supply cable, making a watertight connection.

PAY ATTENTION: use only double-sheathed power supply cable HAR type, or a cable suitable for outdoor use.

3. Drill a hole on the coupling as shown in pict. 1.



4. Place the luminaire on the coupling, make the hole on the coupling coincide with the through hole on the base (3), and tighten the screw fully (4); tighten the screws (5) applying 7 Nm.

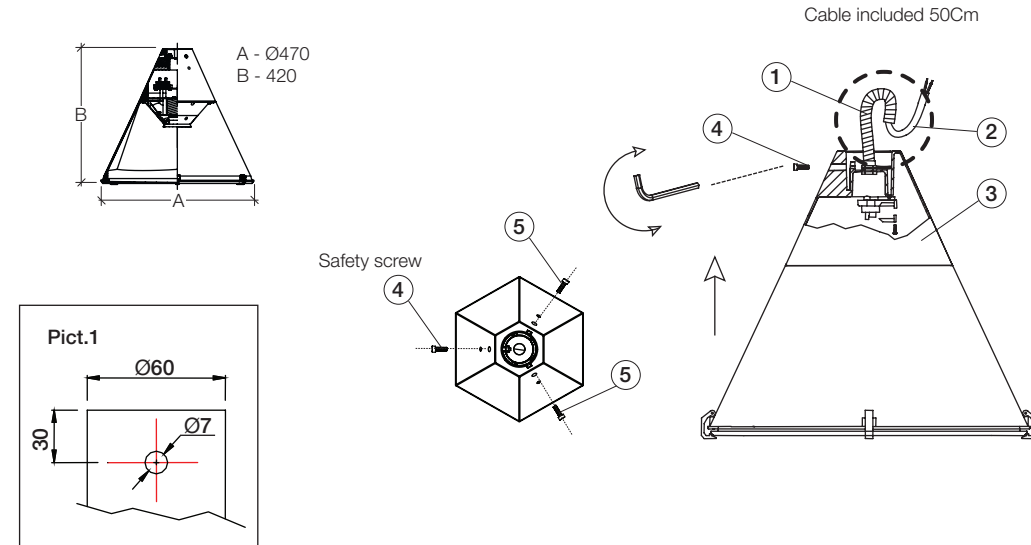


INSTRUCTIONS FOR BRACKET MOUNTING:

1. Insert the supply cable into the bracket through the hole.
 2. Proceed with installing the fitting by following the instructions .
 3. Fix the bracket on the pole or on the wall, depending on the model.
- For the pole version, use the supplied screws, for the wall-mounted version use the screws and expansion caps (not included) according to the type of installation surface.

CAUTION: Choose screws and expansion caps suitable for the type of installation that you are conducting.

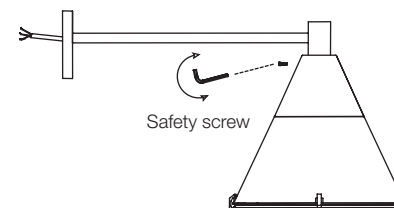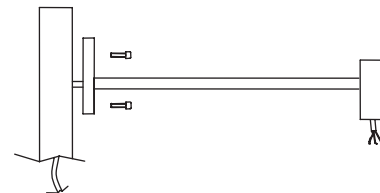

Installation on brackets



Measures expressed in mm

Installation on poles

