


AVVERTENZE:

- LA SICUREZZA DELL'APPARECCHIO È GARANTITA SOLO CON L'USO APPROPRIATO DELLE SEGUENTI ISTRUZIONI, PERTANTO È NECESSARIO CONSERVARLE.
- TOGLIERE LA TENSIONE PRIMA DI EFFETTUARE QUALSIASI TIPO DI MANUTENZIONE.
- UTILIZZARE PER LA CONNESSIONE ALLA RETE SOLO CAVO A DOPPIO ISOLAMENTO, TIPO **H05RN-F sezione minima 2x1mm²**
- IL CONDUTTORE DI TERRA NON DEVE ENTRARE NELL'APPARECCHIO.
- NON PULIRE LO SCHERMO CON DETERGENTI AGGRESSIVI


ISTRUZIONI PER L'INSTALLAZIONE:

1. Togliere il diffusore, facendolo ruotare di circa 60°.
2. Estrarre il gruppo cablato (5) per accedere alla base (4).
3. Introdurre il cavo di alimentazione (3) nel foro ricavato nella base (4).
4. Collegare i conduttori del cavo di alimentazione (3) al morsetto (7).
5. Serrare il cavo di alimentazione (3) tramite il dispositivo di ancoraggio (1) con l'apposita vite (2).
6. Fissare la base (4) sul palo tramite la vite blocca-palo (6).
7. Collegare i conduttori del cavo (8) del gruppo cablato (5) al morsetto (7).
8. Introdurre il gruppo cablato (5) sulla base (4).
9. Inserire il diffusore, ruotarlo di circa 60°.

NB: Questo apparecchio non è adatto alla pubblica illuminazione

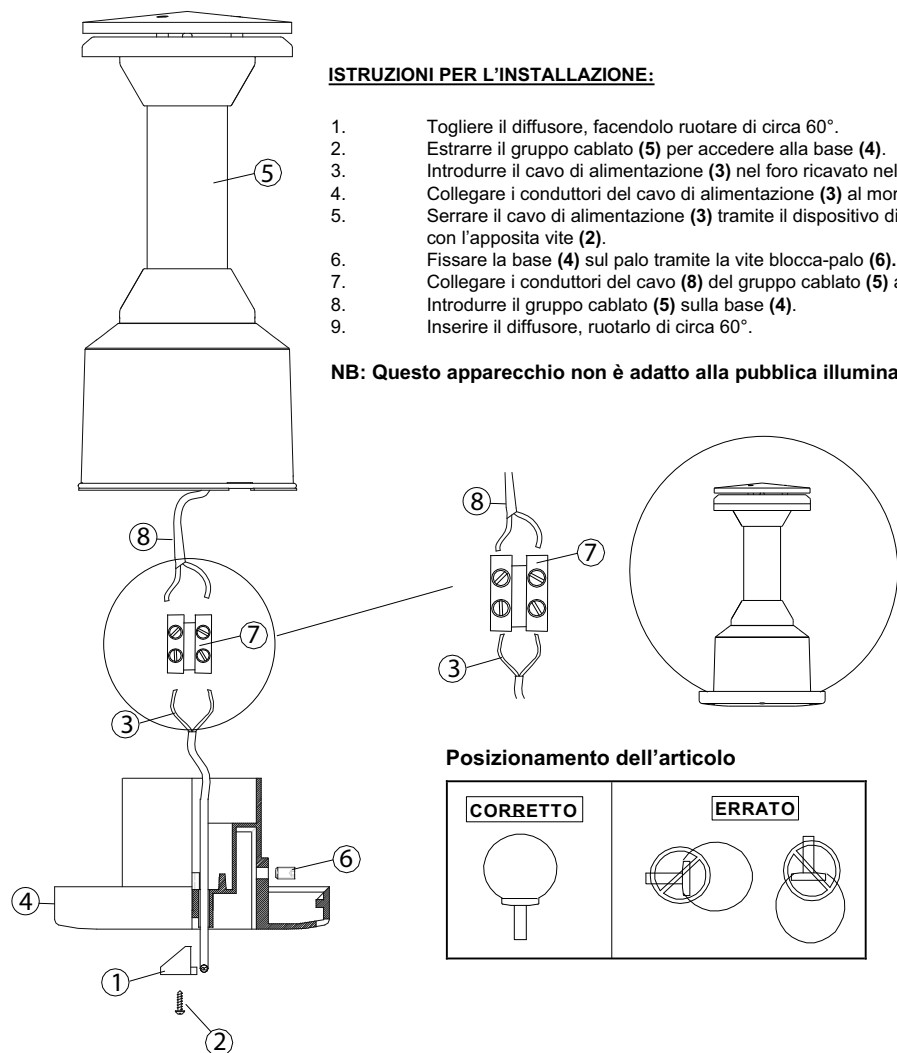

Posizionamento dell'articolo

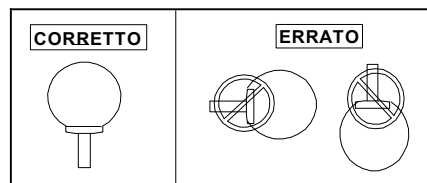


WARNINGS:

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE APPROPRIATE USE OF INSTALLATION INSTRUCTIONS WHICH MUST BE PRESERVED.
- SWITCH OFF THE ELECTRICITY BEFORE STARTING ANY KIND OF MAINTENANCE.
- FOR THE CONNECTION TO THE MAIN LINE USE ONLY A DOUBLE INSULATION CABLE **H05RN-F minimum section 2x1mm²**
- THE EARTH MUST NOT ENTER THE FITTING
- DO NOT USE HARSH CHEMICAL DETERGENTS FOR CLEANING DIFFUSER

ASSEMBLY INSTRUCTIONS:

1. Remove the diffuse by making it turn of about 60°.
2. Extract the wiring compartment (5) to have access to the base (4).
3. Insert the feeding cable (3) into the hole crossing the base (4).
4. Connect the conductors of the feeding cable (3) to the terminal block (7).
5. Tighten the feeding cable (3) by using the anchoring device (1) with the supplied screws (2).
6. Fix the base (4) to the pole using the provided blocking screw (6).
7. Connect the conductors (8) of the wiring compartment (5) cables to the terminal block (7).
8. Fix the wiring compartment (5) on the base (4).
9. Insert the diffuser and turn it of about 60°.

NB: This fixture is not suitable for public lighting

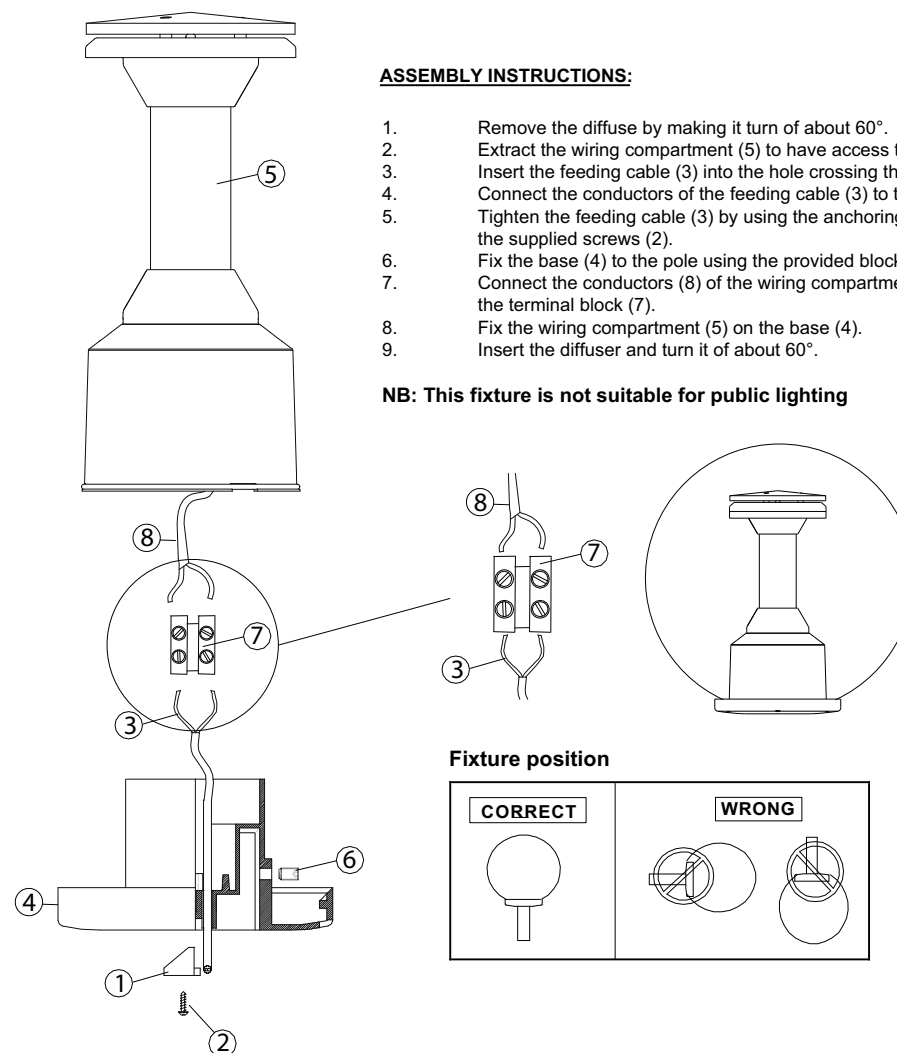

Fixture position

