




**ATTENTION:** Cut exactly at the points indicated with the symbol of the scissors shown on the strip in order to optimize the welding on both sides.

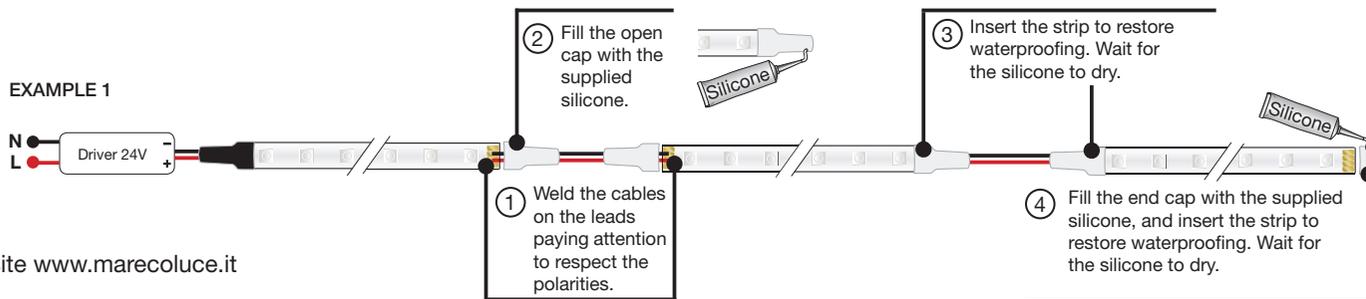

## Use and maintenance instructions

### Kit Hydra

Strip connection kit

 The UE declaration of conformity can be downloaded from our website [www.marecoluce.it](http://www.marecoluce.it)

 This product must not be disposed as a normal household waste

## WARNINGS:

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS, AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS, AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- THE LED'S STRIP CAN BE CUT ONLY IN THE POINTS MARKED WITH THE SYMBOL OF THE SCISSORS; PAY ATTENTION: WHEN YOU CUT THE LED'S STRIP THE IP65/IP68 PROTECTION DEGREE IS NO LONGER GUARANTEED!!!


## PRECAUTIONS OF USE

- TO CONNECT ONE PC OF THE LED'S STRIP TO THE OTHER:
  - CLEAN THE LEAD BY USING THE APPROPRIATE ELECTRICAL CONTACT CLEANER.
  - COMBINE THE TWO ENDS AND TIN THEM, PAYING ATTENTION TO RESPECT THE POLARITIES.
- TO CONNECT A CABLE TO THE LED'S STRIP:
  - CLEAN THE LEADS BY USING THE APPROPRIATE ELECTRICAL CONTACT CLEANER.
  - PER-TIN EACH CONDUCTOR AND THE STRIP LEADS, COMBINE THE TWO PARTS AND TIN THEM, PAYING ATTENTION TO RESPECT THE POLARITIES.

## INSTALLATION INSTRUCTIONS:

1. Insert the open cap into the cables, and weld the cables to the leads paying attention to respect the polarities.
2. Fill the open cap with the supplied silicone.
3. Insert the open cap into the LED's strip and wait for the silicone to dry.
4. For the end part of the strip: fill the end cap with the supplied silicone and insert it into the strip.

Strip connection kit includes:  
- N° 4 open caps  
- N° 3 end caps  
- N° 2 cable (length 150 mm cad.)  
- N° 1 silicone tube 10 ml

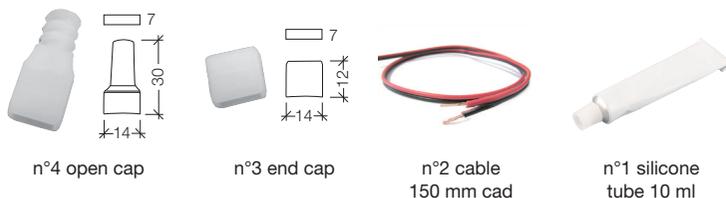

**ATTENTION:** Cut exactly at the points indicated with the symbol of the scissors shown on the strip in order to optimize the welding on both sides.

